


Innovative Epoxy Curing Agent

# Gaskamine 328

Modified Polyamine Hardener

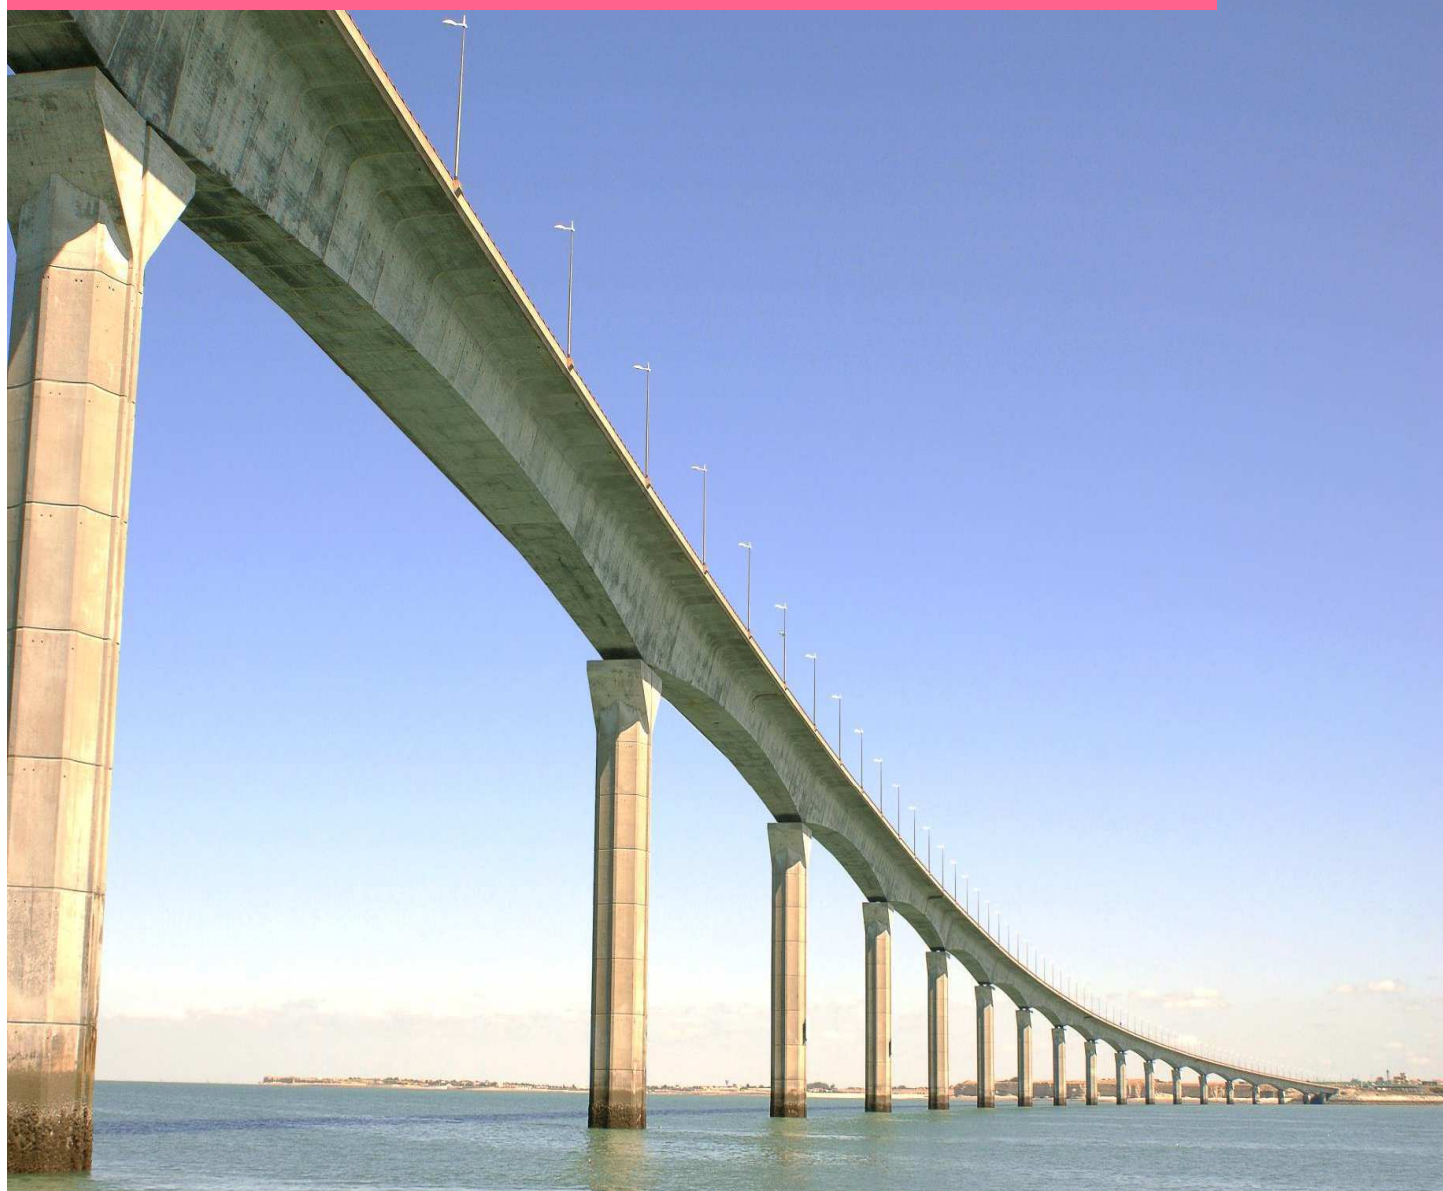

## Usage

**G-328** is a modified polyamine hardener with excellent **chemical resistance**, **wet surface adhesion** and **fast cure** properties.

**Use alone** or as a **blended accelerator** to achieve faster curing time performance.

### 1) Ready to Use as is:

- *MXDA like properties*
- *Curing performance even at low temperatures*
- *Good Chemical Resistance*
- *Excellent Wet Surface Adhesion Performance*

### 2) Accelerator:

- *Accelerates curing time of current hardener when blended*

	G-328
Viscosity (25°C)	7000-14000 mPa·s
Free MXDA	24-28 wt%
<b>AHEW</b> (Active Hydrogen Equivalent Weight)	55

## Contact Information

[www.aromaticchemicals.com](http://www.aromaticchemicals.com)



### Japan

Mitsubishi Gas Chemical Co., Inc.

Phone: +81-3-3283-4754

E-Mail: [mxda@mgc.co.jp](mailto:mxda@mgc.co.jp)

### Europe

Mitsubishi Gas Chemical Europe GmbH

Phone: +49-211-363 080

E-Mail: [contact@mgc-europe.de](mailto:contact@mgc-europe.de)

### Singapore

Mitsubishi Gas Chemical Singapore Pte. Ltd.

Phone: +65-6224-0059

E-Mail: [contact@mgcs.com.sg](mailto:contact@mgcs.com.sg)

### China

Shanghai Ryoyo Trading Co., Ltd.

Phone: +86-21-5228-0585

E-Mail: [fengqiaojie@ryoyotrading.com](mailto:fengqiaojie@ryoyotrading.com)

### USA

Mitsubishi Gas Chemical America, Inc.

Phone: +1-212-687-9030

E-Mail: [contact@mgc-a.com](mailto:contact@mgc-a.com)

### Thailand

MGC Trading Thailand Ltd.

Phone: +66-2-670-3417

E-Mail: [contact@mgc.co.th](mailto:contact@mgc.co.th)



**MITSUBISHI GAS CHEMICAL CO., INC.**